


Fire Resistant Batt & Coating

Trade Name: ASTROBATT, ASTROCOAT

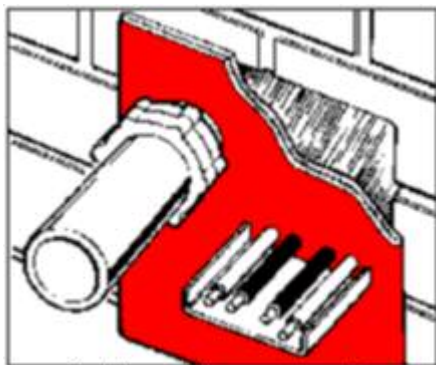

Red shows intumescent product

Description

Specifically designed for sealing around service penetrations in walls and floors, a single Astroflame board (60mm thick) can provide high levels of fire integrity and insulation offering up to 4 hours resistance in accordance with BS4746: Part 20: 1987.

Astroflame Boards consist of a mineral fibre core coated on both sides with Astroflame Mastic, which transforms into a hard ceramic during a fire to prevent the passage of fire and smoke and the transfer of heat.

ASTROCOAT Spread Grade Mastic should be used in conjunction with ASTROBATT on cut edges or joints (see below for order details).

Availability

BATT : 600mm x 1200mm x 60mm: 160kgm³ density.

ASTROCOAT: 15 Litre pail

To Order & Specify

BS476: Part 20: 1987

Up to 4 hours fire resistance

Economical

Halogen free

Reduced smoke properties

Chemical resistant

Weather resistant

LANTAC Building Control Approval

NHBC Type Approval.

BATT

Please quote- Quantity / Trade name / Product ref / Description
Typical wording - 20/ ASTROBATT / AFB1200DC / 1200X600

ASTROCOAT - SPREAD GRADE MASTIC

Please quote- Quantity / Trade name / Product ref /
Typical wording - 5 / ASTROCOAT / AFBCOAT15L

Fire Test Or Assessment Reports

BS476 Part 20: 1987
LANTAC Building Control Approval.
NHBC Type Approval.

Health And Safety

We recommend that dust masks, gloves and eye protection be worn when cutting the boards as the dust produced is an irritant. Do not ingest Fire Coating - Avoid contact with eyes. Keep out of reach of children. Does not emit halogen or other toxic gases when exposed to flame. Normal good industrial and personal hygiene practices should be observed.

Astroflame (Fire Seals) Ltd.
Intumescent House
Unit 8 The IO Centre
Stephenson Road
Segensworth
FAREHAM
ENGLAND PO15 5RU

Tel: 0800 019 7610 Fax: 0800 019 7611
International - Tel: +44 1329 844 500 Fax: +44 1329 844 600
eMail: sales@astroflame.com